

GB2158939

Publication Title:

Monitoring condition of surface

Abstract:

Abstract of GB2158939

A surface-condition detection and/or monitoring arrangement comprises input and output optical fibres 1,2 having ends terminating in close proximity at the surface 4 being monitored (e.g. aircraft wing surface or rotor blade surface of helicopter). Source 5 applies light signals to the input optical fibre 1 which is so arranged relative to the output optical fibre that light emerging at the surface 4 will be variably reflected and scattered by surface ice, water, oil, etc, into the adjacent end of the output fibre 2. Detection means 8 is provided at the far end of the output fibre for detecting and analysing the light output at different wavelengths to determine and provide an indication of the presence and/or composition of any film on the surface 4.

Data supplied from the esp@cenet database - Worldwide

Courtesy of <http://v3.espacenet.com>

(12) **UK Patent Application** (19) **GB** (11) **2 158 939 A**

(43) Application published 20 Nov 1985

(21) Application No 8412385

(22) Date of filing 15 May 1984

(71) Applicant
The Plessey Company plc (United Kingdom),
Vicarage Lane, Ilford, Essex

(72) Inventor
Dr John Philip Dakin

(74) Agent and/or Address for Service
K J Thorne,
The Plessey Company plc, Intellectual Property
Department, Vicarage Lane, Ilford, Essex

(51) INT CL⁴
G08B 19/02 G01N 21/41


(52) Domestic classification
G1A A4 A6 A9 G6 MP P10 R7 S12 T14 T21 T2 T3
U1S 1446 1839 1840 1854 2323 G1A

(56) Documents cited
GB 1561867 GB 1289146 GB 0621489
GB 1364846



(58) Field of search
G1A

(54) **Monitoring condition of surface**

(57) A surface-condition detection and/or monitoring arrangement comprises input and output optical fibres 1,2 having ends terminating in close proximity at the surface 4 being monitored (e.g. aircraft wing surface or rotor blade surface of helicopter). Source 5 applies light signals to the input optical fibre 1 which is so arranged relative to the output optical fibre that light emerging at the surface 4 will be variably reflected and scattered by surface ice, water, oil, etc. into the adjacent end of the output fibre 2. Detection means 8 is provided at the far end of the output fibre for detecting and analysing the light output at different wavelengths to determine and provide an indication of the presence and/or composition of any film on the surface 4.

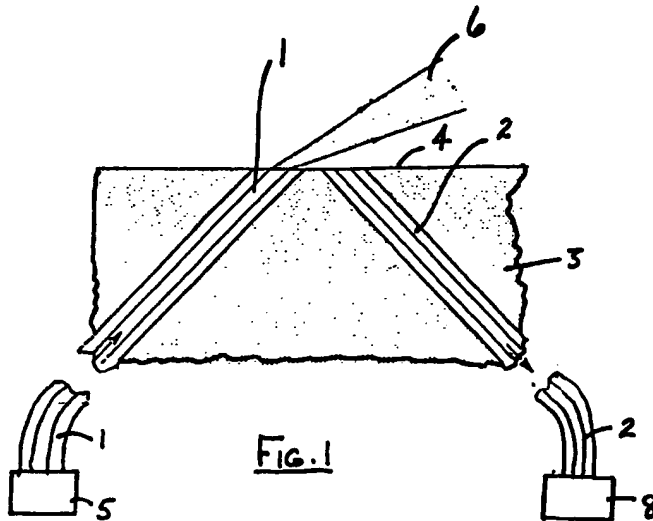

GB 2 158 939 A

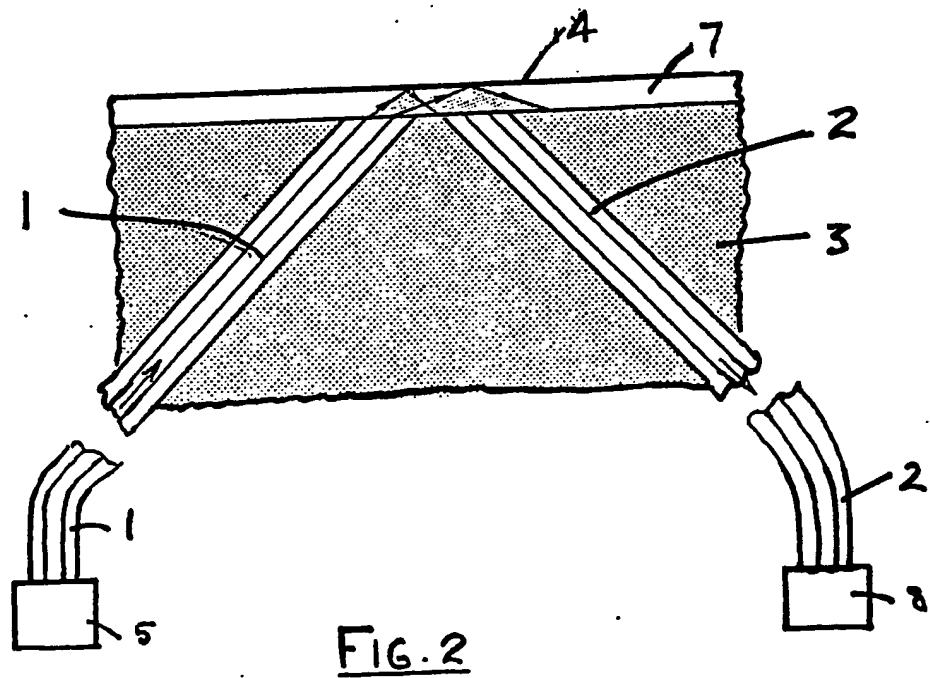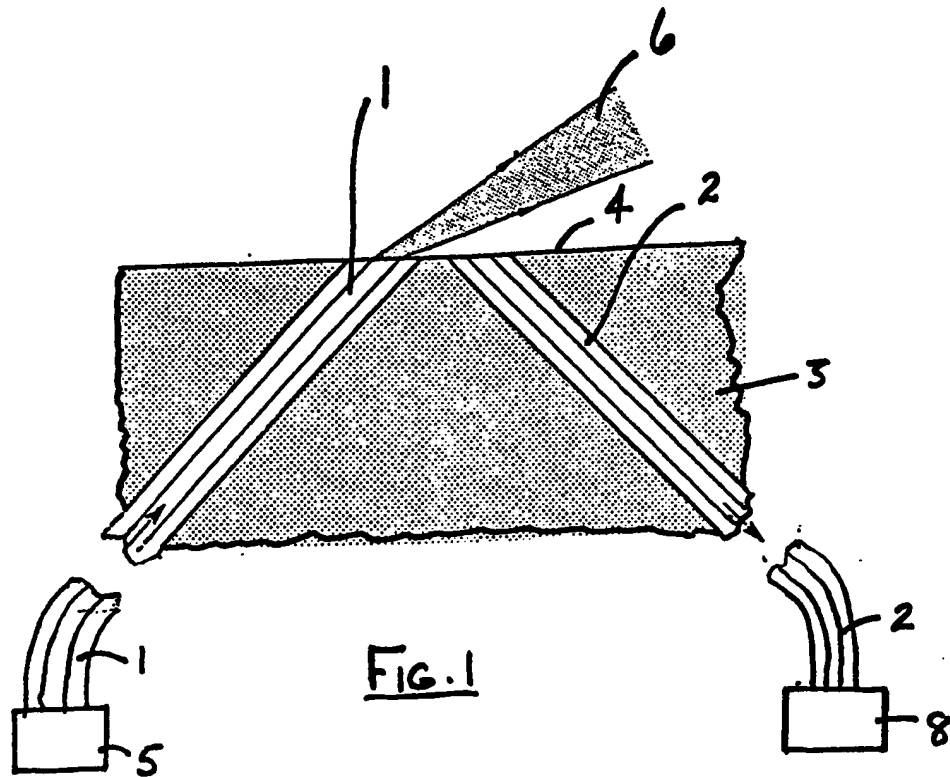

SPECIFICATION

Improvements relating to the detection and/
5 or monitoring of surface conditions

10 This invention relates to arrangements for detecting and/or monitoring surface conditions. (e.g. ice, water and oil films etc.) and is especially concerned with the detection of ice on the wings or rotor blade surfaces of aircraft.

15 According to the present invention there is provided a surface-condition detection and/or monitoring arrangement comprising input and output optical fibres having ends thereof terminating in close proximity with one another at the surface concerned (e.g. aircraft wing surface or rotor blade surface of helicopter)
20 means for generating and applying light signals to the input optical fibre which is so arranged relative to the output optical fibre that light emerging from the end of the input optical fibre terminated at said surface, will be
25 variably reflected and scattered by surface ice, water, oil, etc, into the end of the output optical fibre, detection means being provided at the far end of the output fibre for detecting and analysing the light output to determine
30 and provide an indication of surface conditions.

35 When the surface being monitored is free of ice, water, oil, etc, substantially none of the light emerging from the input optical fibre will enter the output fibre.

40 One of the principal advantages of the present invention, is that it does not require any part of the detection monitoring arrangement to project from the surface being monitored since the adjacent ends of the input and output optical fibres effectively form part of the surface being monitored. For this reason, the detection arrangement will be less vulnerable to damage than condition detecting arrangements already known.

45 The optical spectrum of the light output (or part of that spectrum) may be analysed by the analysing means to determine the composition of the surface film producing reflection and scattering of the light.

50 In order to distinguish between the light transmitted through the optical fibres and the ambient light, the light applied to the fibres may be of periodically-varying intensity in order to provide an alternating component to the light which can be detected by the detector analyser means.

55 By way of example, the present invention will now be described with reference to the accompanying drawing, in which:
60

Figures 1 and 2 are diagrams of the optical fibre surface-condition detector arrangement and illustrates the mode of operation of the arrangement.

65 Referring to Fig. 1, the detector arrangement

ment comprises input and output optical fibres 1 and 2, which in the present example are embodied in a structure 3 which may be the wing of an aircraft. The upper ends of the optical fibres 1 and 2, as viewed in the Figure
70 are terminated adjacent one another and flush with the surface 4 of the structure 3 so that they effectively define a continuation of the surface 4. In operation of the surface-condition detection/monitoring arrangement, the
75 input end of the input optical fibre 1 will have a light signal applied to it from a light source 5. This light signal is preferably of periodically-varying intensity so that the detector arrangement can distinguish positively from
80 ambient light impinging on the arrangement.

This periodically-varying light signal travels along the input fibre 1 until it reaches the end thereof. When the surface 4 is not covered
85 with a transparent or translucent film of water, ice, oil, etc, the light emerging from the end of the fibre 1 defines a light beam 6 which radiates into the atmosphere above the surface 4 so that virtually none of the light beam
90 6 enters the output fibre 2.

However, in the presence of a film 7 of water, ice or oil, on the surface 4, as shown in Fig. 2, the light beam emerging from the input fibre 1 will be internally reflected by the
95 film 7 so that a significant proportion of the light emerging from the optical fibre 1 enters the end of the output optical fibre 2. This light travels along the output fibre 2 and is detected and analysed at the far end of the
100 optical fibre 2 by means of a detector/analyser means 8.

The detector/analyser means 8 serves to analyse the composition of the surface film 7 by making a simple analysis of the optical
105 spectrum (or part of the spectrum) of the transmitted light which may have an alternating component due to the periodic variation of the light intensity. This analysis serves to determine the degree of light absorption within
110 spectral regions at which the ice, water or oil exhibit significant differences in transmission. In this connection the principal absorption of light by hydrocarbon oil in the 0.8 to 1.0 μm and 1.2 to 1.6 μm wavelength region of the
115 optical spectrum is due to C-H vibrational absorption and this differs significantly from the absorption spectrum of water in the same regions. Water has different absorption characteristic curves which are due to O-H vibrational absorption. Ice has a slightly different
120 absorption from water due to hydrogen bonding mechanisms which cause alterations in the characteristic O-H absorption.

Thus the detector arrangement can identify
125 the composition of the transparent film (e.g. water, ice, oil etc). The detection of water at low temperatures may also serve as a warning of the likelihood of ice film formation.

As will readily be apparent from the foregoing description of one embodiment of the
130

invention, the surface-condition detection/
monitoring arrangement has application in
many different fields where the presence of
water, ice or oil on surfaces can present
5 serious hazards.

CLAIMS

1. A surface condition detection and/or
monitoring arrangement comprising input and
10 output optical fibre means having ends
thereof terminated in close proximity with one
another at the surface concerned, means for
generating and applying light signals to the
input optical fibre means which is so arranged
15 relative the output optical fibre means that
light emerging from the surface terminated
end of the input optical fibre means will be
variably reflected and scattered by surface ice,
water, oil, etc, into the surface-terminated end
20 of the output optical fibre means and detec-
tion means provided at the far end of the
output optical fibre means for detecting and
analysing the light output to determine and
provide an indication of surface conditions.
- 25 2. A surface condition detection and/or
monitoring arrangement as claimed in claim
1, in which the surface ends of the input and
output optical fibre means are flush with and
effectively form part of the surface being
30 monitored.
3. A surface condition detection and/or
monitoring arrangement as claimed in claim 1
or claim 2, in which the detection means
analyses the optical spectrum (or part thereof)
35 to determine the composition of the surface
film producing reflection and scattering of the
light.
4. A surface condition detection and/or
monitoring arrangement as claimed in claim 1
40 or claim 2, in which the light applied to the
input optical fibre means is of periodically-
varying intensity in order to provide an alter-
nating component to the light which can be
detected by the detection means.
- 45 5. A surface condition detection arrange-
ment substantially as hereinbefore described
with reference to the accompanying drawing.